


ACEBEAM

Light Where You Want It

User Manual

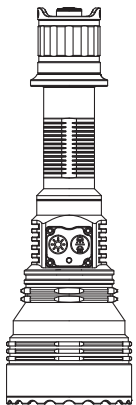

W35

LC DEL Zoom LEP Flashlight
Learn more on www.acebeam.com

FEATURES

- Light source: 1 x LEP high-performance module
- Liquid Crystal Diffractive Electro-optic Lens (LC DEL) Zoom
- Max Spot: 2600 meters (1690000cd); 800 lumens
- Max Flood: 131 meters (4290cd); 570 lumens
- Battery: 1x 21700 Acebeam Li-Ion Included
- Reverse polarity protection, to protect from improper battery insertion
- Built-in USB Type-C charging port
- The indicator light indicates the charging status or the remaining battery power
- All circuitry contact points are gold-plated, providing better conductivity and superior durability
- The tactical strike bezel can also be used as an emergency glass breaker
- Premium type II hard anodized anti-abrasive finish
- Perfect for security, tactical and law enforcement
- IP68 grade (2 meters submersible), Impact resistance 1.5 meters
- Weight: 327.4g w/ battery

INCLUDED

1x ACEBEAM W35; 1x ACEBEAM 21700 battery; 1x Lanyard;
1x Type-C charging cable; 2x O-rings; 1x Warranty card; 1x User manual

TECHNICAL PARAMETER

FLI STANDARD	Turbo	High	Med	Low	Strobe	
	800-470 lumens	470 lumens	230 lumens	80 lumens	470 lumens	
	6min+ 1h40min	2h	4h	8h 20min	3h	
	2600m	2050m	1450m	850m	2050m	FLI STANDARD 1.5m
	1690000cd	1050625cd	525625cd	180625cd	1050625cd	
FLI STANDARD	Turbo	High	Med	Low	Strobe	
	570-350 lumens	350 lumens	180 lumens	60 lumens	350 lumens	
	6min+ 1h30min	1h 50min	3h 40min	6h 40min	2h 50min	FLI STANDARD 2m
	131m	101m	73m	45m	101m	
	4290cd	2550cd	1332cd	506cd	2550cd	


Notice: The above-mentioned parameters (tested with 1x ACEBEAM 21700 battery) are approximate and may vary from flashlights, batteries, and environments.

OPERATING INSTRUCTION


- **Tail Power Switch Operation**
ON: Click the Power Switch,
OFF: Click the Power Switch when ON.
 - **Output Switch Operation**
When the light is ON, single click the Output Switch to cycle from Low-Med-High, double click to get Turbo, triple click to get Strobe.
 - **Zoom Switch Operation**
When the light is ON, single click the Zoom Switch to cycle 9 levels of flood to throw, every double click to cycle between Max Spot and Max Flood.
- Strobe, Turbo, and Max spot & Max flood gain by double click the Zoom Switch will be not memorized.

INSULATING FILM


Before first use, unscrew the tail switch and remove the insulating film.



BATTERY INSTALLATION



CHARGING INDICATION



BATTERY VOLTAGE WARNING

- Green light: >30%
- Red light: among 30%~10%, low battery warning
- Red flash light: <10%

The light will be turned off when the voltage is below 2.7V

LOW-VOLTAGE WARNING

With the lamp switched on, and the voltage drop below 10%, to remind you to charge/replace the battery. When the 21700 battery voltage drops below 2.7V, the lamp will turn off automatically.

FAQ & SOLUTIONS

Problems	Causes	Solutions
Abnormal flash or failure to turn on	Check if the switch is turned on correctly	The tail switch Click to turn on the Light
	Check if it is assembled in place	Tighten the assembly parts
	Check if the battery is no power	Try the battery on other products
	Check if the battery is reversed	Remove the battery and reassemble it correctly
Abnormal noise	Check if the conductive position is dirty	Clean the surface with alcohol
	Check if foreign matter falls in the tube	Pour out possible foreign matter
	Part damage	Contact your seller

WARNING

1. CAUTION! Possible dangerous radiation! Don't look into the light! Dangerous for your eyes.
2. By using this device, you certify you have read the included User

Manual and Warning Card and release the manufacturer and retailers from all liabilities.

3. Please use in accordance with applicable laws and regulations.
4. Quality batteries with circuit protection will reduce the potential risk.
5. Do not aim this light directly at eyes or exposed skin to prevent injuries. Keep this flashlight out of the reach of children.

USAGE AND MAINTENANCE

1. Unauthorized disassembly may damage the light and void the warranty.
2. This is normal case the light will accumulate a lot of heat when used on Turbo output levels for extended periods.
3. Lubricate the threads with professional grade lubricant regularly.
4. Please swap out the O-rings regularly to maintain the water resistance level.
5. Maintain and keep clean any contact surfaces of the flashlight with alcohol swab. This may prevent irregular flashes during use.
6. Remove batteries during storage. Keep lithium-ion batteries charges approximately every 4 months.
7. This flashlight may not be used as diving light.

PRODUCT WARRANTY

1. We replace any quality defective lights within 15 days of purchase.
2. We offer warranty within 12 months of purchase if problems develop with normal use for LEP model, 12 months for LEP model, battery, battery pack, charger, remote switch and other accessories.
3. Limited lifetime warranty, we charge for replacement parts.
4. The warranty does not cover damage or failure caused by:
 - A. Rough usage or operation which does not comply with the user manual or product specifications.
 - B. Unauthorized disassembly, repair or modification, Defects or damaged caused by factors out of Acebeam's control.
 - C. Battery leakage damaged products.
5. If there are any questions about ACEBEAM products, please consider the warranty and contact Acebeam or your original Acebeam dealer for warranty return instructions. Email: info@acebeam.com

DISCLAIMER CLAUSE

Acebeam is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual.



Wechat: ACEBEAM01



FB: AcebeamWorld

SHENZHEN ZENBON TECHNOLOGY CO., LTD
+86-0755-23036551
www.acebeam.com
info@acebeam.com



1/F, No.1 Building, Yijiyang Industrial Park, Dalang, Longhua, Shenzhen 518100, Guangdong, China

Copyright © 2023 ACEBEAM. All rights reserved.
Powered by Shenzhen Zenbon Technology Co., Ltd